


FICHA TÉCNICA

CANAleta PARSHALL

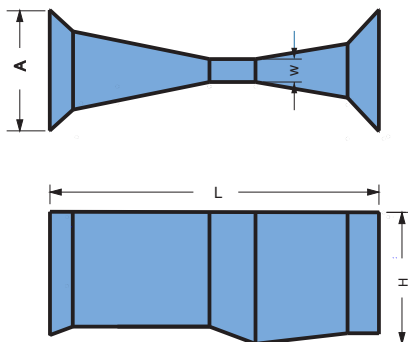

W CMS	W PULG	Q MIN (l/Seg)	Q MAX (l/Seg)	LARGO	ANCHO	ALTO
2,5	1	0,3	5,0	63,5	50,0	25,8
5,1	2	0,6	13,0	77,3	70,0	39,9
7,6	3	0,8	55,0	122,0	76,8	43,8
15,2	6	1,5	110,0	183,0	90,2	57,1
22,9	9	2,5	250,0	193,1	108,0	72,4
30,5	12	3,1	455,0	325,0	149,2	114,4
45,7	18	4,3	700,0	332,6	167,6	114,4
61,0	24	12,0	950,0	340,2	185,4	114,4
91,5	36	17,0	1400,0	355,1	222,3	114,4
122,0	48	37,0	1900,0	377,7	271,1	114,4
152,5	60	60,0	2400,0	392,3	308,0	114,4
182,8	72	70,0	2900,0	407,2	344,2	114,4

Materialidad



Fibra de vidrio
recubierta con
resina antiácida



Acero inox. 304 o 316



Incluye regleta
de medición
en acrílico.

2 unidades.
Medición en l/s